




Features:

- Low coupling capacitance and leakage inductance
- Small package for SMT

Mechanical

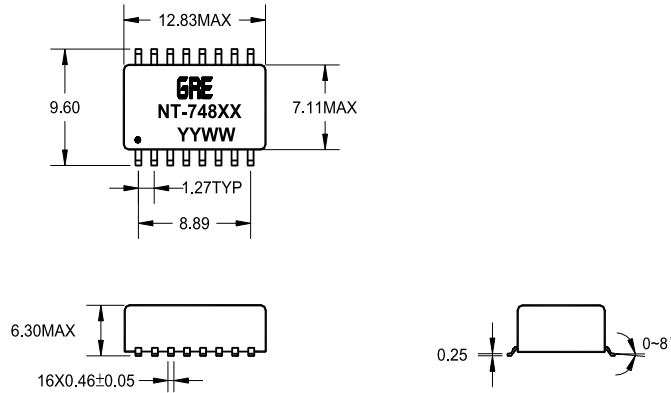

Unit: mm
Unless otherwise specified, all tolerances are ± 0.25


Electrical Specifications@25°C

Operating Temperature 0°C~70°C

| Part Number | Primary pins | Turn Ratio ($\pm 6\%$) | Rise Time (ps MAX) 20~80% | OCL (μH MIN) | Low Frequency cutoff (-3dB) | DCR (Ω MAX) | Hi-pot (Vrms) |
|-------------|--------------|--------------------------|---------------------------|--------------------|-----------------------------|---------------------|---------------|
| NT-74801 | 1-3/6-8 | 1CT:1CT | 350 | 5.50 | ≤ 2.5 MHz | 0.21 | 1500 |
| NT-74802 | 1-3/6-8 | 1:1 | 280 | 5.50 | ≤ 2.5 MHz | 0.21 | 1500 |

Schematics

NT-74801

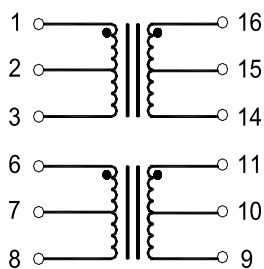

NT-74802

